

Environmental Product Declaration

Global GreenTagEPD Program: Compliant to EN15804+A2 2019



Compact Laminate Multipurpose Impressions 332 Bay Rd, Cheltenham Victoria 3192,Australia

Laminex

Laminex

Compact Laminate-Multipurpose Impressions

Mandatory Disclosu EPD type	ires Cradle to grave A1 to	C4 + D	EPD Numbers	LGLP04 2023EP					
Issue Date	29 July 2023		Valid Until	29 July 2028					
Demonstration of Verification									
PCR	and Ceiling Linings Su	andard EN 15804+A2 2019 serves as core Product Category Rules (PCR) [1]. Wall ad Ceiling Linings Sub-PCR WCL:2023 as well as Fitted Cabinetry Sub-PCR C:2023 also applies [2 and 3].							
☑ Internal	Dehun Jones 29 July 2023 Anapa 25.07.2023	LCA Developed by Delwyn Jones, The Evah Institute LCA Reviewed by Direshni Naiker The Evah Institute							
	07/11/2023		viewed by David Bagg ional Pty Ltd	gs, Global GreenTag					
☑ External		Third Party Verifier ^a Mathilde Vlieg Malaika LCT a. Independent external verification of the declaration and data, mandatory for pusiness-to-consumer communication according to ISO 14025:2010 [2].							
Communication		This EPD discloses potential environmental outcomes compliant with EN 15804 for business-to-business communication.							
Comparability		Ds may no	t be comparable. Coi	ble if not EN15804 compliant. mparability is further dependent					
Reliability	LCIA results are rel endpoints, exceeding			predict impacts on category risks.					
Owner	This EPD is the prope	•							
Explanations	contacting <u>certification</u>			lobalgreentag.com or by					
EPD Program Op	erator	LCA and	EPD Producer	Declaration Owner					
Global GreenTag I	nternational Pty Ltd	Ecquate F	Pty Ltd	Laminex Industries					
L38, 71 Eagle St.,	Brisbane	PO Box 1	23 Thirroul	332 Bay Rd., Cheltenham					
QLD 4170 Australi	а	NSW 251	5 Australia	VIC 3192 Australia					
Phone: +61 (0)7 33	3 999 686	Phone: +6	61 (0)7 5545 0998	Phone: +61 (08) 9780 1300					
http://www.globalg	reentag.com	http://www	v.ecquate.com	http://www.thelaminexgroup.com.au					
GLOBA GREEN				_aminex					

Ecquate building ecopositive

INTERNATIONAL

Laminex

Compact Laminate-Multipurpose Impressions

Program Description

EPD type	Cr	adle	dle to grave A1 to C4 + D as defined by EN 15804 [1]																	
System boundary		e system boundary with nature includes material and energy acquisition, occasing, manufacture, transport, installation, use plus waste arising to end of life.																		
Stages included	St	tage	s A1-	3 A4-	5, B1-4	, C′	1 to	C2	and	d C4	D1 to	5 D3								
Stages excluded	N	o sta	ige w	as ex	cluded	but	flov	NS a	and	resu	lts fo	r B5-I	37, (C3 a	and	D3 v	vere a	all ze	ro.	
Scope Depiction		igure 1 depicts all modules being declared including some with zero results. Any nodule not declared (MND) does not indicate a zero result.																		
Model	1	Actu	al						Sce	nario	os						F	Poten	tial	
Information					Buildin	g Li	fe (Cycl	e A	sses	smei	nt					Sup	plem	entary	
Stages	П	rodu	uat	Con	struct	Use				End-of-Life			Fo.	Benefit & load						
Data Modules	Г	Tout	ICL	CON	Struct		Fabric Operate				End-oi-Lile			е	beyond system					
Unit Operations	A1	A2	A3	A4	A5	B1	B2	В3	Β4	B5	B6	B7	C1	C2	C3	C4	D1	D2	D3	
Cradle to Gate+ Options & Grave	Resources	Transport	Manufacture	Transport	Construct	Use	Maintain	Repair	Replace	Refurbish	Energy use	Water use	Demolish	Transport	Process Waste	Disposal	Reuse	Recovery	Recycling	

Figure 1 EPD Life Cycle Modules Cradle to Grave

Data Sources

Primary Data	Data was collected from primary sources 2019 to 2022 including the manufacturer and suppliers' standards, locations, logistics, technology, market share, management system in accordance with EN ISO 14044:2006, 4.3.2, [4]. All are biochemical-physical allocated none are economically allocated.
A1-A3 Stage inclusions	Operations include all known raw material acquisition, refining, processing plus scrap or material reuse from prior systems; electricity generated from all sources with extraction, refining & transport plus secondary fuel energy and recovery processes. Also, transport to factory gate; manufacture of inputs, ancillary material, product, packaging, maintenance, replacement plus flows leaving at end-of-waste boundary and fate of all flows at end of life.
Variability	Significant differences of average LCIA results are declared.
Chemicals of Concern	Contains no substances in the European Chemicals Agency "Authorised or Candidate Lists of Substances of Very High Concern (SVHCs)".

Data Quality

Data cut-off & quality criteria complies with EN 15804 [1] The LCA used background data aged <10 years and quality parameters tabled below.

Background	Data Quality	Parameters and Uncertainty (U)							
Correlation	Metric σg	U ±0.01	U ±0.05	U ±0.10	U ±0.20				
Reliability	Reporting	Site Audit	Expert verify	Region	Sector				
	Sample	>66% trend	>25% trend	>10% batch	>5% batch				
Completion	Including	>50%	>25%	>10%	>5%				
	Cut-off	0.01%w/w	0.05%w/w	0.1%w/w	0.5%w/w				
Temporal	Data Age	<3 years	≤5 years	<7.5 years	<10 years				
remporar	Duration	>3 years	<3 years	<2 years	1 year				
Technology	Typology	Actual	Comparable	In Class	Convention				
Geography	Focus	Process	Line	Plant	Corporate				
	Range	Continent	Nation	Plant	Line				
	Jurisdiction	Representation is Global. Africa, North America, Europe, Pacific Rim							

Laminex

Compact Laminate-Multipurpose Impressions

Product Information

The Laminex Group is a leading manufacturer, distributor and marketer of decor board and surfaces.

Brand Name & Code	Compact Laminate-Multipurpose Impressions 13mm
Range Names	Compact Laminate
Factory warranty	10 years interior residential and commercial use
Manufacturer address	Laminex Industries332 Bay Rd., Cheltenham VIC 3192 Australia
Site representation	Australasia
Geographical Area	Use and disposal as for Australasia
Application	Benchtops, Cabinetry & Wall Linings
Function in Building	Benchtop, Cabinetry & Wall Linings
Lifetime [5,6]	20 years Reference Service Life (RSL) [ISO 15686]
Declared unit	Compact Laminate Multipurpose Impressions 18.46kg/m ² inside buildings
Functional unit	20 years interior use of declared product/kg cradle to grave

Product Components

This section summarises factory components, functions, source nation and % mass share. In product content listed below the % mass has a \pm 5% range and a confidence interval that is 90% certain to contain true population means at any time. Listing such 90 \pm 5% certainty considers normal resource acquisition, supply chain, sedimentation, seasonal, manufacturing and product variation over this EPD's validity period. This also allows for intellectual property protection whilst ensuring fullest possible transparency.

Function	Component	Cradle	% w/w
Filler	Cellulose Fibre	Global	>66 <67
Binder	Phenol Formaldehyde	Germany	>31 <32
Other Agents	Plasticiser, catalyst, biocide, wetting & release agents	Global	each <1.0
Packaging			
Crate	Timber	Australia	>3.0 <4.0
Pallet	Timber	Australia	>1.5 <2.0
Wrapping etc	Polymers	Global	>1.0 <1.5
Coverboards	Medium density fibreboard	Australia	>0.1 < 0.2
Straps & Tape	Polyester	Global	>0.05 < 0.10

Product Functional & Technical Performance Information

This section provides manufacturer specifications and additional information.

Specifications, Maintenance, Fire, Safety & Installation	https://www.laminex.com.au/trade
AS/NZS standard classification	Group 3
Panel dimensions length*width ±10mm	3.6*1.5m or 3.6*0.75m
VOC Specific Area Emission Rate	0.5mg/m²/hr

Laminex

Compact Laminate-Multipurpose Impressions

System Analysis Scope and Boundaries

Stages A1 to 3 model actual operations. Stage A4 to C4 are model scenarios.

Typical scenarios are assumed to forecast unit operations as described in the next section.

Figure 2. shows included processes in a cradle to grave system boundary to end of life fates to unshown beyond the boundary reuse, recycling or landfill grave.

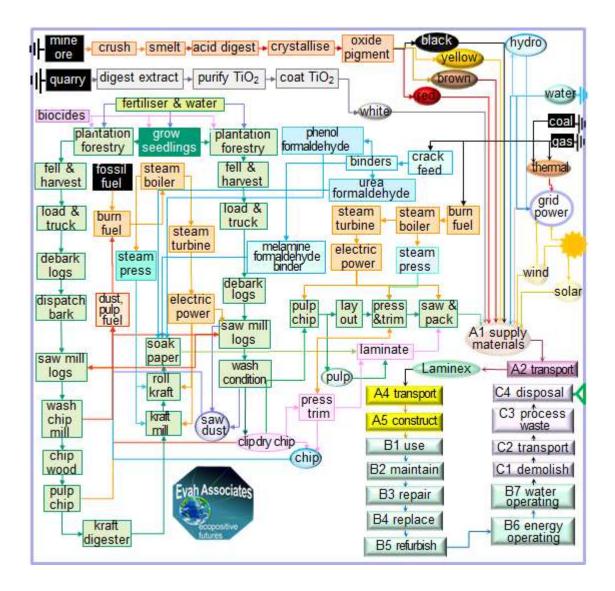


Figure 2. Product Process Flow Chart

Laminex

Compact Laminate-Multipurpose Impressions

Scenarios for Modules/Functional Unit

Stages A1 to A3 model actual operations. This section defines scenarios A4 to D3. C3 Waste Treatment has no flows.

1.1						
	Phase	Operation	Type specified	Amount	Type specified	Amount
		Transport to Site	25t semi-trailer	60 km	85% Capacity	Full back load
A4 Transp		Long distance road	25t semi-trailer	600km	85% Capacity	Full back load
		Continental freight rail	Diesel train	600km	85% Capacity	Full back load
	Transport	Container shipping	Factory to CBD	1,200km	85% Capacity	Full back load
		Volume capacity (<1 ≥1)	Utilisation factor	1	Uncompressed	Un-nested
		Ancillaries	Adhesive	0.025kg	Edge trim	0.0001kg
		Packing	Cardboard	0.005kg	Polymer	0.00001kg
	A5	Water & Energy	Town water	0.5litre	Grid power	0.0002 MJ
		Waste on site	Trims	0.05kg	All packaging	As shown kg
		Scrap collection & route	25t semi-trailer	60 km	to landfill	In LCA report
		Emissions	Nil to air & water	0.0kg	All from landfill	In LCA report
		Maker's specification	URL Declared	Specified	Clean cycle	Weekly
	B2 Maintain	Ancillaries	Wipes	Negligible	Detergent	0.007kgpa
		Surface Washdown	Town water	1.95kgpa	Net to drain	1.90kgpa
		Typical practice	Damaged parts	0.05kg	Worn parts	Same 5%
		Maker's specification	As per website	Specified	Freight to site	As A5
	Repair	Energy input & source	No excess	0.0MJpa	Packaging	As A5
	C1	Typical practice	Remove worn	0.05kg	Collect Separate	0.05kg
	Demolish	Collection process	In site waste	0.40kg	Separate to reuse	0.0kg
	C2 Transport	Typical practice	25t truck road	50km	85% capacity	No back load
	C3 Waste Treatment	Typical practice	No waste treated	0.0kg	Not for energy	0.0kg
		Typical practice	Product specific	0.05kg	Collect separately	0.05kg
	C4	Typical practice	Worn to landfill	5%	All emissions	mass share
	Dispose	Recovery system	No recycling	0.0kg	Not for energy	0.0kg
	D1 Reuse	Typical practice	Reuse	95%	Patch 5%	0.05kg
	D2 Recover	Typical practice	Recover	100%	Cleaning	sweep
	D3 Recycle	None typically	At 60 years	Nil	None	0%

Laminex

Compact Laminate-Multipurpose Impressions

Environmental Impact Terminology

The United Nations reports only a few decades are left to resolve accelerating climate emergency and extinction crises. It is a call to action to all people to reverse the loss of climate and biodiversity security from human development in all activity [16]. Key environmental damages contributing to risks of ecological and community loss and collapse are tabled below with common names and remedies for each indicator.

Climate change from anthropo- genic infrared forced global warming	Greenhouse gases absorb infra-red radiation. This heat reduces thermal energy differentials, from equator to poles, forcing ocean current and wind circulation to blend and regulate climate. Weakly blended "lumpier" weather has more frequent, extreme heat wave, fire-storm, cyclone, rain-storm, flood and blizzard events. Accumulation of carbon dioxide, natural gas methane, nitrous oxides and volatile organic compounds from burning fossil fuels causes global warming. Forest and wilderness growth absorbing air-borne carbon in biomass can drawdown such accumulation. Urgent renewable energy reliance is vital in time to avoid imminent tipping points and the worsening " <i>climate emergency</i> ".
Ozone layer depletion	Stratospheric ozone loss weakens the planet's solar shield so more shorter wavelength ultraviolet (UVB) light reaching earth damages plants and increases malignant melanoma and skin cancer in humans and animals. Chlorofluorocarbons, hydrochlorofluorocarbons (HCFC), hydrobromofluorocarbons, carbon tetrachloride, chlorobromomethane, methyl chloroform, methyl bromide and halon gas cause ozone layer loss. To repair the "ozone hole" reliance on ozone-safe refrigerants, aerosols and solvents is essential to avoid further its depletion and enable accumulation of naturally-formed ozone.
Acidification of air, land and waters	Acidification in the atmosphere reduces soil and waterway pH, impedes nitrogen fixation vital for plant growth and inhibits natural decomposition. It increases rates and incidence of fish kills, forest loss and deterioration of buildings and materials. Chief synthetic causes of " <i>acid rain</i> " are emissions of sulphur and nitrogen oxides, hydrochloric and hydrofluoric acids and ammonia from burning fossil fuels polluting precipitation of rain and snow world-wide.
Eutrophication of terrestrial, freshwater and marine life	Eutrophication from excessively high macronutrient levels added to natural waters promotes excessive plant growth that severely reduces oxygen, water and habitat security for aquatic and terrestrial organisms across related ecosystems. Chief synthetic cause of " <i>algal blooms</i> " is nitrogen (N, NOx, NH ₄) and phosphorus (P, PO ₄ ³⁻) in rain run-off over-fertilised land catchments.
Photochemical ozone creation	Tropospheric photochemical ozone, called " <i>summer smog</i> " near ground level, is created from natural and synthetic compounds in UV sunlight. Low concentration smog damages vegetation and crops. High concentration smog is hazardous to human health. Chief synthetic causes are nitrogen oxides, carbon monoxide and volatile organic compounds (VOC) pollutants. Avoiding reliance on dirtiest coal fuel and volatile chemicals has reduced smog incidence in many areas globally.
Depletion of minerals, metals & water	Abiotic depletion of finite mineral resources increases time, effort and money required to obtain more resources to the point of extinction of naturally viable reserves. This can limit access to available, valuable and scarce elements vital for human-life. The youth movement " <i>extinction rebellion</i> " calls on adults to secure climate, material reserves and biodiversity for current and future generations.
Depletion of fossil fuel reserves	Abiotic depletion of resources by consuming finite oil, natural gas, coal and yellowcake fossil fuel reserves leaves current and future generations suffering limited available, accessible, plentiful, essential valuable as well as scarce raw material, medicinal, chemical, feedstock and fuel stock. Approaching " <i>peak oil</i> " acknowledged fossil fuel reserves are finite and the need for decision-makers to act to avoid market instability, insecurity and or oil and gas wars.

Laminex

Compact Laminate-Multipurpose Impressions

Glossary of Impact Assessment Terms, Methods and Units

Acronyms, methods and units of impact potentials plus inventory inputs and outputs, are defined below

Acronyms, methods and units of impact po	neritiais plus	s inventory inputs and outputs, are us	
Impact Potentials	Acronym	Description of Methods	Units
Climate Change biogenic	GWP bio	GWP biogenic [7]	kg CO _{2eq}
Climate Change luluc	GWP luluc	GWP land use & change [7]	kg CO _{2eq}
Climate Change fossil	GWP ff	GWP fossil fuels [7]	kg CO _{2eq}
Climate Change total	GWP t	Global Warming Potential [7]	kg CO _{2eq}
Stratospheric Ozone Depletion	ODP	Stratospheric Ozone Loss [8]	kg CFC _{11eq}
Photochemical Ozone Creation	POCP	Summer Smog [9]	kg NMOC _{eq}
Acidification Potential	AP	Accumulated Exceedance [10]	mol H ⁺ _{eq}
Eutrophication Freshwater	EP fresh	Excess nutrients freshwater [11]	kg P _{eq}
Eutrophication Marine	EP marine	Excess marine nutrients [11]	kg N _{eq}
Eutrophication Terrestrial	EP land	Excess Terrestrial nutrients [11]	mol N _{eq}
Mineral & Metal Depletion	ADP min	Abiotic Depletion minerals [12]	kg Sb _{eq}
Fossil Fuel Depletion	ADP ff	Abiotic Depletion fossil fuel [13]	MJ _{ncv}
Water Depletion	WDP	Water Deprivation Scarcity [14,15]	${\sf M}^3$ WDP eq
Fresh Water Net	FW	Lake, river, well & town water	m ³
Secondary Material	SM	Post-consumer recycled (PCR)	kg
Secondary Renewable Fuel	RSF	PCR biomass burnt	MJ _{ncv}
Primary Energy Renewable Material	PERM	Biomass retained material	MJ ncv
Primary Energy Renewable Not Feedstock	PERE	biomass fuels burnt	MJ nov
Primary Energy Renewable Total	PERT	Biomass burnt + retained	MJ _{ncv}
Secondary Non-renewable Fuel	NRSF	PCR fossil-fuels burnt	MJ ncv
Primary Energy Non-renewable Material	PENRM	Fossil feedstock retained	MJ _{ncv}
Primary Energy Non-renewable Not Feedstock	PENRE	fossil-fuel used or burnt	MJ _{ncv}
Primary Energy Non-renewable Total	PENRT	Fossil feedstock & fuel use	MJ ncv
Hazardous Waste Disposed	HWD	Reprocessed to contain risks	kg
Non-hazardous Waste Disposed	NHWD	Municipal landfill facility waste	kg
Radioactive Waste Disposed	RWD	Mostly ex nuclear power stations	kg
Components For Reuse	CRU	Product scrap for reuse as is	kg
Material For Recycling	MFR	Factory scrap to remanufacture	kg
Material For Energy Recovery	MER	Factory scrap use as fuel	kg
Exported Energy Electrical	EEE	Uncommon for building products	MJ _{ncv}
Exported Energy Thermal	EET	Uncommon for building products	MJ _{ncv}

Laminex

Compact Laminate-Multipurpose Impressions

Results Module A Cradle to Site

Table 1 shows results of A1 resourcing, A2 transport, A3 manufacture, A4 delivery and A5 construct.

Table 1 A1 to A5 Impact & Inventory Results/Functional Unit								
Result	A1-3	A4	A5					
Climate Change biogenic	-1.4	-1.1E-06	-7.5E-02					
Climate Change Iuluc	5.7E-02	1.0E-09	2.8E-03					
Climate Change fossil	9.2	1.9E-02	0.47					
Climate Change total	7.9	1.9E-02	0.40					
Stratospheric Ozone Depletion	1.2E-07	1.7E-13	9.1E-09					
Photochemical Ozone Creation	3.9E-02	1.2E-04	2.1E-03					
Acidification Potential	1.8E-02	1.2E-05	9.1E-04					
Eutrophication Freshwater	3.3E-05	5.6E-10	1.9E-06					
Eutrophication Marine	4.1E-03	2.3E-06	2.1E-04					
Eutrophication Terrestrial	3.7E-02	7.7E-06	1.9E-03					
Mineral and Metal Depletion	2.3E-03	7.2E-06	1.2E-04					
Fossil Depletion	5.2	2.2E-02	0.26					
Water Scarcity Depletion	9.0E-02	3.0E-06	4.4E-03					
Net Fresh Water Use	0.54	1.8E-05	2.7E-02					
Secondary Material	0.32	2.3E-06	2.7E-03					
Secondary Renewable Fuel	27	6.8E-06	1.4					
Primary Renewable Material	6.2	3.0E-04	3.1E-03					
Primary Energy Renewable Not Feedstock	5.0E-02	2.4E-03	0.33					
Primary Energy Renewable Total	33	2.7E-03	1.8					
Secondary Non-renewable Fuel	0.26	7.4E-04	1.0E-02					
Primary Energy Non-renewable Material	17	0.11	0.92					
Primary Non-renewable Energy Not Feedstock	83	0.19	4.2					
Primary Energy Non-renewable Total	100	0.30	5.2					
Hazardous Waste Disposed	2.2E-03	3.7E-05	1.2E-04					
Non-hazardous Waste Disposed	0.71	3.1E-04	4.1E-02					
Radioactive Waste Disposed	2.2E-15	1.1E-31	1.1E-16					
Components For Reuse	0	4.4E-3	0					
Material For Recycling	8.0E-02	5.7E-06	6.0E-03					
Material For Energy Recovery	1.9E-04	2.3E-07	2.1E-05					
Exported Energy Electrical	0	0	0					
Exported Energy Thermal	0	0	0					

Laminex

Compact Laminate-Multipurpose Impressions

Results Module B: Building Fabric and Operations

Table 2 shows results of B1 use, B2 maintain, B3 repair, B4 replace, B5 refurbish, B6 energy use and B7 water use.

Table 2 B1 to B7 Impact & Inventory Results/Functional Unit

Table 2 DT to D7 impact & inventory Results/r u							
Result	B1	B2	B3	B4	B5	B6	B7
Climate Change biogenic	0	-0.10	-7.5E-02	0	0	0	0
Climate Change luluc	0	6.5E-06	2.8E-03	0	0	0	0
Climate Change fossil	0	0.72	0.47	0	0	0	0
Climate Change total	0	0.62	0.40	0	0	0	0
Stratospheric Ozone Depletion	0	3.2E-09	9.1E-09	0	0	0	0
Photochemical Ozone Creation	0	3.0E-03	2.1E-03	0	0	0	0
Acidification Potential	0	1.3E03	9.1E-04	0	0	0	0
Eutrophication Freshwater	0	6.5E-07	1.9E-06	0	0	0	0
Eutrophication Marine	0	2.1E-04	2.1E-04	0	0	0	0
Eutrophication Terrestrial	0	1.5E-03	1.9E-03	0	0	0	0
Mineral and Metal Depletion	0	3.2E-04	1.2E-04	0	0	0	0
Fossil Depletion	0	0.52	0.26	0	0	0	0
Water Scarcity Depletion	0	1.1E-02	4.4E-03	0	0	0	0
Net Fresh Water Use	0	6.6E-02	2.7E-02	0	0	0	0
Secondary Material	0	2.7E-03	2.7E-03	0	0	0	0
Secondary Renewable Fuel	0	1.4	1.4	0	0	0	0
Primary Renewable Material	0	3.1E-03	3.1E-03	0	0	0	0
Primary Energy Renewable Not Feedstock	0	0.33	0.33	0	0	0	0
Primary Energy Renewable Total	0	1.8	1.8	0	0	0	0
Secondary Non-renewable Fuel	0	1.0E-02	1.0E-02	0	0	0	0
Primary Energy Non-renewable Material	0	0.92	0.92	0	0	0	0
Primary Non-renewable Energy Not Feedstock	0	4.2	4.2	0	0	0	0
Primary Energy Non-renewable Total	0	5.2	5.2	0	0	0	0
Hazardous Waste Disposed	0	9.9E-04	1.2E-04	0	0	0	0
Non-hazardous Waste Disposed	0	0.11	0.40	0	0	0	0
Radioactive Waste Disposed	0	2.7E-17	1.1E-16	0	0	0	0
Components For Reuse	0	0	0	0	0	0	0
Material For Recycling	0	7.6E-02	6.0E-03	0	0	0	0
Material For Energy Recovery	0	3.6E-05	2.1E-05	0	0	0	0
Exported Energy Electrical	0	0	0	0	0	0	0
Exported Energy Thermal	0	0	0	0	0	0	0

Laminex

Compact Laminate-Multipurpose Impressions

Results Module C: End-of-life

Table 3 shows results for C1 demolish, C2 transport C3 waste processing and C4 disposal.

Table 3 C1 to C4 Impact & Inventory Results/Functional Unit					
Result	C1	C2	C3	C4	
Climate Change biogenic	-7.0E-06	-5.4E-07	0	-3.4E-07	
Climate Change Iuluc	1.0E-08	8.0E-10	0	5.1E-10	
Climate Change fossil	1.9E-03	6.2E-03	0	6.1E-03	
Climate Change total	1.9E-03	6.2E-03	0	6.1E-03	
Stratospheric Ozone Depletion	2.3E-13	1.1E-13	0	8.8E-14	
Photochemical Ozone Creation	7.6E-06	6.0E-05	0	1.4E-04	
Acidification Potential	3.5E-06	5.1E-06	0	1.8E-05	
Eutrophication Freshwater	7.3E-13	3.1E-10	0	2.6E-10	
Eutrophication Marine	6.4E-07	9.4E-07	0	3.3E-06	
Eutrophication Terrestrial	4.1E-06	3.2E-06	0	6.3E-06	
Mineral and Metal Depletion	3.8E-09	4.2E-06	0	4.0E-06	
Fossil Depletion	9.2E-04	7.5E-03	0	7.2E-03	
Water Scarcity Depletion	2.5E-07	1.4E-06	0	1.2E-06	
Net Fresh Water Use	1.5E-06	8.7E-06	0	7.5E-06	
Secondary Material	1.5E-05	1.7E-06	0	1.2E-06	
Secondary Renewable Fuel	7.4E-08	-5.3E-17	0	3.3E-17	
Primary Renewable Material	2.3E-03	2.9E-04	0	2.1E-04	
Primary Energy Renewable Not Feedstock	1.4E-07	1.6E-03	0	1.3E-03	
Primary Energy Renewable Total	2.3E-03	1.9E-03	0	1.5E-03	
Secondary Non-renewable Fuel	1.4E-08	4.8E-04	0	3.9E-04	
Primary Energy Non-renewable Material	2.0E-02	6.3E-02	0	6.0E-02	
Primary Non-renewable Energy Not Feedstock	2.5E-04	3.7E-02	0	4.0E-02	
Primary Energy Non-renewable Total	2.0E-02	0.10	0	0.10	
Hazardous Waste Disposed	7.3E-08	1.2E-05	0	1.2E-05	
Non-hazardous Waste Disposed	5.6E-06	9.6E-05	0	5.0E-02	
Radioactive Waste Disposed	4.4E-21	8.5E-32	0	5.4E-32	
Components For Reuse	0	0	0	0	
Material For Recycling	2.2E-05	4.0E-06	0	3.0E-06	
Material For Energy Recovery	2.9E-10	1.5E-07	0	1.2E-07	
Exported Energy Electrical	0	0	0	0	
Exported Energy Thermal	0	0	0	0	

Laminex

Compact Laminate-Multipurpose Impressions

Results Module D: Beyond System Boundaries

Table 4 has results for benefit and loads in D1 reuse, D3 recycling and D2 recovery.

Table 4 D1 to D3 Impact & Inventory Results/Functional Unit					
Result	D1	D2	D3		
Climate Change biogenic	-0.43	-1.8E-05	-1.3E-03		
Climate Change Iuluc	-1.5E-02	1.8E-09	2.8E-03		
Climate Change fossil	-2.8	2.5E-04	0.47		
Climate Change total	-2.4	2.3E-04	0.40		
Stratospheric Ozone Depletion	-3.4E-08	5.9E-13	9.1E-09		
Photochemical Ozone Creation	-1.3E-02	1.0E-06	2.1E-03		
Acidification Potential	-5.3E-03	4.4E-07	9.1E-04		
Eutrophication Freshwater	-9.9E-06	1.2E-10	1.9E-06		
Eutrophication Marine	-1.2E-03	7.7E-08	2.1E-04		
Eutrophication Terrestrial	-1.1E-02	5.2E-07	1.9E-03		
Mineral and Metal Depletion	-7.2E-04	5.8E-08	1.2E-04		
Fossil Depletion	-1.6	1.5E-04	0.26		
Water Scarcity Depletion	-2.5E-02	1.8E-05	4.4E-03		
Net Fresh Water Use	-0.16	1.1E-04	2.7E-02		
Secondary Material	-7.4E-03	0	2.7E-03		
Secondary Renewable Fuel	-8.0	1.7E-04	1.8E-03		
Primary Renewable Material	-1.7	2.7E-04	0.20		
Primary Energy Renewable Not Feedstock	-6.7E-02	3.0E-05	4.3E-03		
Primary Energy Renewable Total	-10.0	4.7E-04	0.21		
Secondary Non-renewable Fuel	-8.0E-02	7.7E-06	1.5E-03		
Primary Energy Non-renewable Material	-26	2.4E-03	1.9		
Primary Non-renewable Energy Not Feedstock	-6.0	3.2E-04	0.14		
Primary Energy Non-renewable Total	-32	2.7E-03	2.0		
Hazardous Waste Disposed	-1.0E-03	1.9E-07	1.2E-04		
Non-hazardous Waste Disposed	-6.1E-02	2.0E-05	4.1E-02		
Radioactive Waste Disposed	-6.0E-16	4.9E-21	1.1E-16		
Components For Reuse	0	0	0		
Material For Recycling	-4.9E-02	1.5E-05	6.0E-03		
Material For Energy Recovery	-8.3E-05	6.5E-09	2.1E-05		
Exported Energy Electrical	0	0	0		
Exported Energy Thermal	0	0	0		

Laminex

Compact Laminate-Multipurpose Impressions

Interpretation Cradle to Gate A1 to A3

The first interpretation section discusses Compact product results cradle to gate A1 to A3. Their names are Chemical resistant 13mm (Lab13) Chemical resistant 16mm (Lab16) Multipurpose Impressions 13mm (MultiIm) Multi-purpose 13mm (MultiP) Alfresco 13mm (Alfre) Aquapanel 2.7mm (AquaP) and Aquapanel CustomArt 2.7mm (AquaCA).

Figure 3 charts their component mass kg/kg product A1-3. Figure 4 charts energy and feedstock input (MJ), versus filler, binder and greenhouse emissions (GWP) (kg)/kg product A1-3.

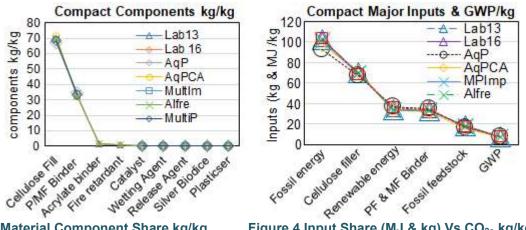



Figure 3 Material Component Share kg/kg

Figure 4 Input Share (MJ & kg) Vs CO_{2e} kg/kg

Figure 3 shows cellulose filler and binders of Phenol or Melamine Formaldehyde were the main components with others having very low mass share. Figure 4 charts all products' reliance on fossil energy then renewable cellulose fill renewable energy use then formaldehyde binders and fossil feedstock and low GWP. Renewable cellulose feedstock fill and renewable energy use reduced GWP.

Interpretation Cradle to Grave and Beyond the System Boundary A1 to D3

The next section discusses product results cradle to fate A1 to C4 and to D3 beyond the system boundary/kg Functional Unit. Figure 5 charts GWP versus fossil and renewable energy and feedstock use. Figure 6 charts Water Deprivation (DepW) Vs Acidification (AP) and Eutrophication terrestrial (EPt)/kg.










Figure 5 shows low GWP overall. It shows flows with minor credits in energy reuse beyond 20-years. Chart 6 shows Acidification and EP peak with cleaning in D1 reuse beyond 20-years.

Laminex

Compliant to EN 15804+A2, ISO 14025 ISO 21930

Compact Laminate-Multipurpose Impressions

References

- [1] EN 15804:2012+A2:2019 Sustainability of construction works Environmental product declarations -Core rules for the product category of construction products.
- [2] GreenTag PCR https://www.globalgreentag.com/get/files/1191/wall-ceiling-linings-sub-pcr-wcl.pdf
- [3] GreenTag PCR https://www.globalgreentag.com/get/files/1189/fitted-cabinetry-sub-pcr-2023-fic.pdf
- [4] ISO 14025:2010 Environmental labels and declarations Type III environmental declarations Principles and procedures.
- [5] ISO14044:2006 Environmental management Life cycle assessment (LCA) Requirements and guidelines.
- [6] ISO 15686-2:2012 Buildings and constructed assets Service life planning Part 2: Service life prediction procedures.
- [7] ISO 15686-8:2008 Buildings and constructed assets Service-life planning Part 8: Reference service life and service-life estimation.
- [8] IPCC 2013, Global Warming Potential 100-year, IPCC Fifth Assessment Report Climate Change.
- [9] WMO 2014, Ozone Depletion Potentials for Steady-state, Scientific Assessment of Ozone Depletion: 2014, Global Ozone Research and Monitoring Project Report No. 55, 2014.
- [10] Van Zelm, R., Huijbregts, M., Hollander, H., Jaarsveld, H., Sauter, F., Struijs, J., Wijnen, H., Van de meent, D. 2008, European characterization factors for human health damage of PM10 and ozone in life cycle impact assessment, J O Atmospheric Environment 42(3):441-453, as applied in ReCiPe LOTOS-EUROS. DOI: 10.1016/j.atmosenv.2007.09.072
- [11] Seppälä, J., Posch, M., Johansson, M. and Hettelingh, J-P. 2006 Country-dependent Characterisation Factors for Acidification and Terrestrial Eutrophication Based on Accumulated Exceedance as an Impact Category Indicator, T Int J O LCA 11(6):403-416 Nov 2006 DOI:10.1065/Ica2005.06.215
- [12] Posch, M., Seppälä, J., Hettelingh, J-P., and Johansson, M., (2008) The role of atmospheric dispersion models and ecosystem sensitivity in the determination of characterisation factors for acidifying and eutrophying emissions in LCIA, Sept 2008, I J of Life Cycle Assessment 13(6):477-486., DOI:10.1007/s11367-008-0025-9
- [13] Struijs, J., Beusen, A., van Jaarsveld, H. & Huijbregts, M.A.J. (2009b). Aquatic Eutrophication. Ch 6 in: Goedkoop, M., Heijungs, R., Huijbregts, M.A.J., De Schryver, A., Struijs, J., Van Zelm, R. (2009). ReCiPe 2008 A LCIA method which comprises harmonised category indicators at the midpoint and the endpoint level. Report I: Characterisation factors, 1st Ed.
- [14] CML–IA V4.1 LCA methodology, 2002, October 2012, CML University of Leiden, Netherlands.
- [15] Guinée et al., 2002, and van Oers et al., 2002 CML LCA methodology 2002a, Institute of Environmental Sciences (CML), Faculty of Science, University of Leiden, Netherlands.
- [16] Boulay, A-M., Bare, J., Benini, L., Berger, M., Lathuilliere, M., Manzardo, A., Margni, M., Motoshita, M., Núñez, M., Pastor, A., Ridoutt, B., Oki, T., Worbe, S., Pfister, S. (2018). The WULCA consensus characterization model for water scarcity footprints: assessing impacts of water consumption based on available water remaining (AWARE). I J of LCA. 23. 1-11. 10.1007/s11367-017-1333-8.